


Coil CWE

APPLICATION:

As a spare part of electro-pneumatic solenoids used in rail vehicles (including, but not limited to, H9E1, H9E2, H908a, H909).

TECHNICAL DESCRIPTION:

The spool is made from plastic in black colour – after winding, the coil is overmoulded with plastic under pressure to make it difficult to steal copper contained in it.

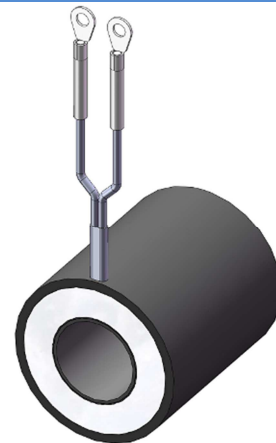

SPECIFICATION:		ver. 1	ver. 2	ver. 3	ver. 4
Rated voltage	[VDC]	24	48	110	72
Rated power	[W]	22	23	28	25
Rated resistance	[Ω]	26	100	430	212
Insulation class		F	F	F	F
Work time	[%] ED	100	100	100	100
Max ambient temperature	[°C]	+50	+50	+50	+50
Weight	[kg]	0,45	0,45	0,45	0,45
Coil opening diameter	[mm]	Ø 26	Ø 26	Ø 26	Ø 26
Overall dimensions	[mm]	Ø 54 x 63	Ø 54 x 63	Ø 54 x 63	Ø 54 x 63

